

Made in Vietnam



Tel No.: 844-546-9887

E-mail: TBR2@jinyutires.com

Website: www.amulettiresus.com

2024P010312

AMULET



TRUCK AND BUS TIRES

COMMERCIAL TIRE CATALOG

ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R & D and manufacturing enterprise. The company has total assets of 5.5 billion Yuan and there are more than 3,500 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are two plants respectively located in China and Vietnam with total capacity of 6 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.



Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 20 years. The R&D center not only utilizes advanced equipment but is also committed to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

Enterprise Mission

Concentrate on rubber tire technology, service development and application;
Commit ourselves to providing customers the best value and experience.

Enterprise Vision

To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating ethically, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!



AMULET



Cabot Corporation (NYSE: CBT) is a leading global specialty chemicals and performance materials company headquartered in Boston, Massachusetts, USA.


The power of Cabot is that we combine this knowledge with our technical expertise and, ultimately partner with our customers to create value through innovation and technology. Our strength in research and development is a major reason why we have been an industry leader for more than 130 years in products such as rubber and specialty carbons, activated carbon, aerogel, fumed metal oxides, graphenes, inkjet colorants, masterbatches and conductive compounds. We continue to innovate through @cabotlabs, which integrates our expert team of engineers, scientists and researchers with market intelligence and technology leadership to deliver solutions for tomorrow.

Innovation is a key driver of Bekaert's technological leadership. Ever since the establishment of the company back in 1880, innovation has been a top priority within Bekaert. The invention of reverse twist barbed wire, patented in 1881, may not impress you as an example of high-tech innovation today, it certainly was 135 years ago! By the way, we still manufacture this product today.

Transforming steel wire and applying advanced coating know-how. That is what we are good at. Improving both the bulk and surface properties of steel wire products since almost 140 years. That is what we do better, every day. Offering innovative solutions that add value to our customers and help them grow their business. That is what makes us better together.



@ **BEKAERT**
better together

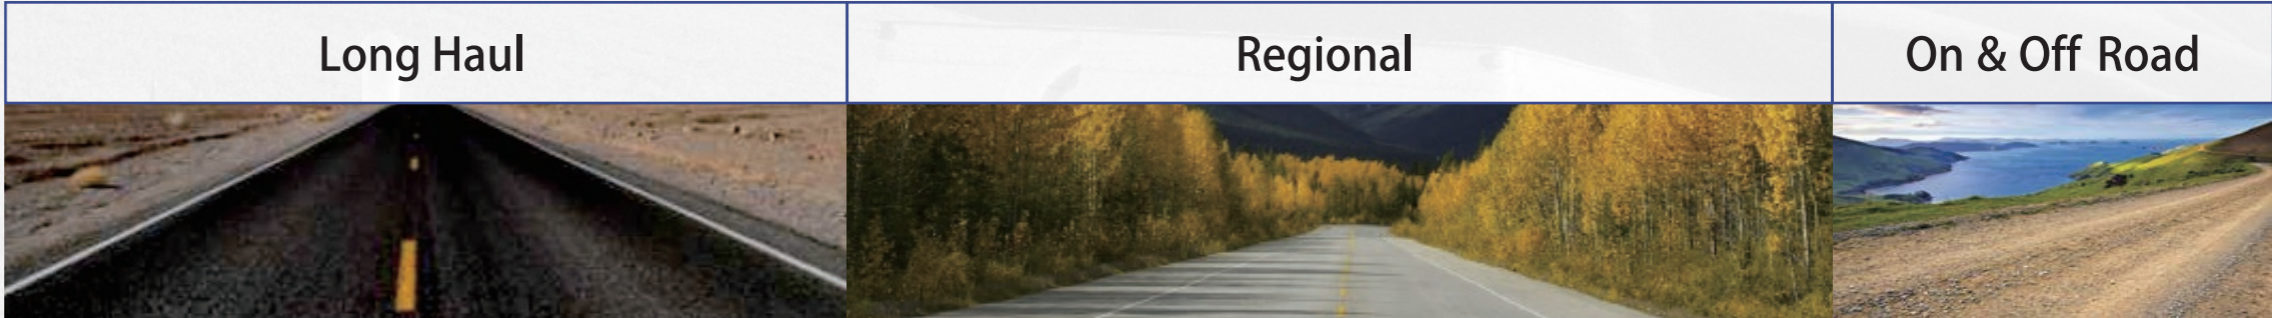

Steer



Drive



Trailer



All-Position




- Amulet tires provide:
- Advanced Engineering & Technology
 - Enhanced footprint provides stability & excellent weight displacement
 - Premium 4 steel belt construction in 22.5 & 24.5



AD506

Application


Medium and long mileage trucks running on paved and highway roads



- ✓ Low Heat Generation & Wear Resistance
- ✓ Excellent Grip
- ✓ Economy and Environment Friendly



Suitable



Low-temperature mixing technology is used to improve wear resistance and reduce heat generation.

Separated block pattern design brings outstanding grip.

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302002345 | 245/70R19.5 | 7.50 | 16 | 4940 | 4675 | 120 | 120 | 136 | 134 | 19 | 81 | 33 | 9.8 |



AT505

Application


Steer and All-Position



- ☑ Long tread life and great high speed stability
- ☑ Durable and wear-resistant sidewall
- ☑ Resists heat build-up
- ☑ Low noise emissions and reduced stone retention



● Suitable

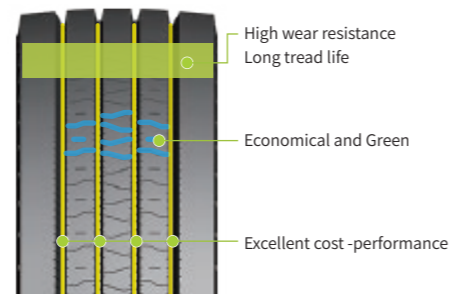

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001510 | 215/75R17.5 | 6.00 | 16 | 4805 | 4540 | 125 | 125 | 135 | 133 | 15 | 75 | 30.2 | 8.3 |
| 3302001550 | 235/75R17.5 | 6.75 | 18 | 6005 | 5675 | 125 | 125 | 143 | 141 | 16 | 75 | 31.4 | 9.2 |
| 3302001202 | 225/70R19.5 | 6.75 | 14 | 3970 | 3750 | 110 | 110 | 128 | 126 | 15 | 75 | 31.9 | 8.9 |
| 3302001320 | 245/70R19.5 | 7.50 | 16 | 4940 | 4675 | 120 | 120 | 136 | 134 | 16 | 81 | 33 | 9.8 |
| 3302001311 | 255/70R22.5 | 7.50 | 16 | 5510 | 5070 | 120 | 120 | 140 | 137 | 16 | 81 | 36.6 | 10.0 |
| 3302001512 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 20 | 75 | 41.5 | 11.0 |
| 3302001513 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 20 | 75 | 41.5 | 11.0 |
| 3302001467 | 275/70R22.5 | 8.25 | 16 | 6940 | 6395 | 130 | 130 | 148 | 145 | 18 | 81 | 37.7 | 10.8 |
| 3302001508 | 275/80R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 20 | 75 | 39.9 | 10.8 |
| 3302001765 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 20 | 75 | 39.9 | 11.7 |
| 3302001766 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 20 | 75 | 39.9 | 11.7 |
| 3302001376 | 315/80R22.5 | 9.00 | 20 | 8820 | 8050 | 125 | 125 | 156 | 153 | 22 | 75 | 42.3 | 12.4 |
| 3302001516 | 11R24.5 | 8.25 | 14 | 6610 | 6005 | 105 | 105 | 146 | 143 | 20 | 75 | 43.5 | 11.0 |
| 3302001517 | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 20 | 75 | 43.5 | 11.0 |
| 3302001522 | 285/75R24.5 | 8.25 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 20 | 75 | 41.3 | 11.1 |
| 3302001523 | 285/75R24.5 | 8.25 | 16 | 6780 | 6175 | 120 | 120 | 147 | 144 | 20 | 75 | 41.3 | 11.1 |
| Pending | ST235/80R16 | 6.50 | 14 | 4080 | 3640 | 110 | 110 | 129 | 125 | 12 | 81 | 30.8 | 9.2 |
| Pending | ST235/85R16 | 6.50 | 14 | 4400 | 3860 | 110 | 110 | 132 | 127 | 13 | 81 | 31.7 | 9.2 |



*Smartway Verification: End 2024



AD507

Application


Long Haul Drive



- ☑ Excellent grip
- ☑ Excellent durability
- ☑ Excellent traction
- ☑ Excellent cost performance



● Suitable

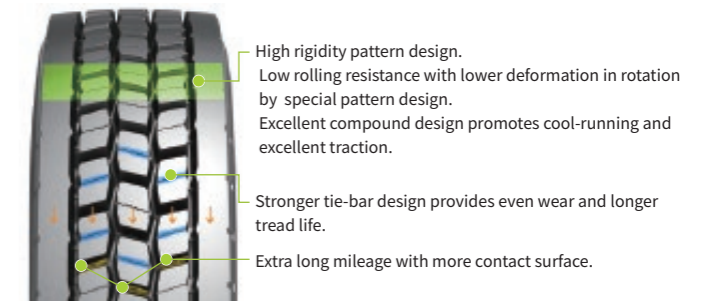

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001074 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 29 | 75 | 41.9 | 11.0 |
| 3302001075 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 29 | 75 | 41.9 | 11.0 |
| 3302001078 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 29 | 75 | 39.9 | 11.7 |
| 3302001079 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 29 | 75 | 39.9 | 11.7 |
| 3302001076 | 11R24.5 | 8.25 | 14 | 6610 | 6005 | 105 | 105 | 146 | 143 | 29 | 75 | 43.5 | 11.0 |
| 3302001077 | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 29 | 75 | 43.5 | 11.0 |
| 3302001080 | 285/75R24.5 | 8.25 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 29 | 75 | 41.3 | 11.1 |
| 3302001081 | 285/75R24.5 | 8.25 | 16 | 6780 | 6175 | 120 | 120 | 147 | 144 | 29 | 75 | 41.3 | 11.1 |



AD170

Application

Long Haul Drive



- High wear resistance
- Excellent traction



Suitable

- Enhanced profile design and improved compounds provide lower rolling resistance and aids in optimized fuel consumption
- Integration of a new wear-resistant compound and lower heat generation fillers ensure excellent mileage and performance along with improved cut & tear resistance
- Optimized block pattern and multi-sipe design provides excellent reaction in dry and wet weather driving conditions
- Increased tire width creates a larger footprint which promotes stability and longer tread life

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001648 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 28 | 75 | 41.9 | 11.0 |
| 3302001647 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 28 | 75 | 41.9 | 11.0 |
| 3302001655 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 28 | 75 | 39.9 | 11.7 |
| 3302001654 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 28 | 75 | 39.9 | 11.7 |



AD515

Application

Regional Drive



- Excellent traction
- Better grip
- Tread chunking resistance



Suitable

- High-traction design
- Stone rejection design
- Superior irregular wear resistance
- Long-wearing cap compound is engineered for superior mileage
- Save cost per mile by providing an extra-deep tread

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001286 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 27 | 75 | 41.9 | 11.0 |
| 3302001242 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 27 | 75 | 41.9 | 11.0 |
| 3302001266 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 27 | 75 | 40.2 | 11.7 |
| 3302001279 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 27 | 75 | 40.2 | 11.7 |
| 3302001287 | 11R24.5 | 8.25 | 14 | 6610 | 6005 | 105 | 105 | 146 | 143 | 27 | 75 | 43.9 | 11.0 |
| 3302001243 | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 27 | 75 | 43.9 | 11.0 |
| 3302001282 | 285/75R24.5 | 8.25 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 27 | 75 | 41.3 | 11.1 |
| 3302001283 | 285/75R24.5 | 8.25 | 16 | 6780 | 6175 | 120 | 120 | 147 | 144 | 27 | 75 | 41.3 | 11.1 |
| 3302002357 | 225/70R19.5 | 6.75 | 14 | 3970 | 3750 | 110 | 110 | 128 | 126 | 20 | 75 | 31.9 | 8.9 |



AT159


Application
Long Haul Trailer



- ✓ High wear resistance
- ✓ Low noise emissions
- ✓ Long tread life
- ✓ Cool running



● Suitable

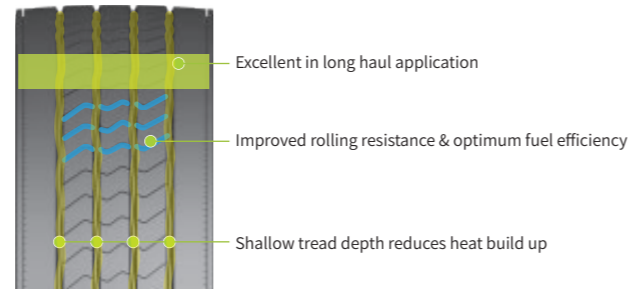

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001546 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 11 | 81 | 41.5 | 11.0 |
| 3302001547 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 11 | 81 | 41.5 | 11.0 |
| 3302001761 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 11 | 81 | 39.9 | 11.7 |
| 3302001762 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 11 | 81 | 39.9 | 11.7 |



*Smartway Verification: End 2024



AT502


Application
Long Haul Trailer



- ✓ High wear resistance
- ✓ Low noise emissions
- ✓ Long tread life
- ✓ Cool running



● Suitable

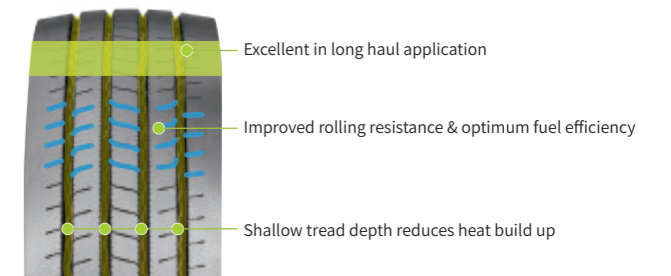

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001174 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 11 | 81 | 41.5 | 11.0 |
| 3302001175 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 11 | 81 | 41.5 | 11.0 |
| 3302001180 | 11R24.5 | 8.25 | 14 | 6610 | 6005 | 105 | 105 | 146 | 143 | 11 | 81 | 43.5 | 11.0 |
| 3302001181 | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 11 | 81 | 43.5 | 11.0 |
| 3302002150 | 295/75R22.5 | 9.00 | 14 | 6175 | 5675 | 110 | 110 | 144 | 141 | 11 | 81 | 39.9 | 11.7 |
| 3302002499 | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 11 | 81 | 39.9 | 11.7 |



AA610

Application


Mixed Service-All Position



- ✓ Excellent durability
- ✓ High strength
- ✓ Cut and Chip resistant compound



● Suitable

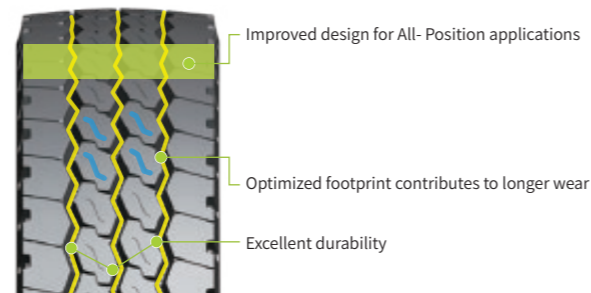

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|-------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| 3302001293 | 11R22.5 | 8.25 | 14 | 6175 | 5840 | 105 | 105 | 144 | 142 | 22 | 68 | 41.5 | 11.0 |
| 3302001276 | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 22 | 68 | 41.5 | 11.0 |
| 3302001297 | 11R24.5 | 8.25 | 14 | 6610 | 6005 | 105 | 105 | 146 | 143 | 22 | 68 | 43.5 | 11.0 |
| 3302001296 | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 22 | 68 | 43.5 | 11.0 |
| 3302002241 | 315/80R22.5 | 9.00 | 20 | 10200 | 9090 | 130 | 130 | 161 | 157 | 22 | 68 | 42.3 | 12.4 |



AA612

Application


All-Position



- ✓ Excellent durability
- ✓ Cool running



● Suitable

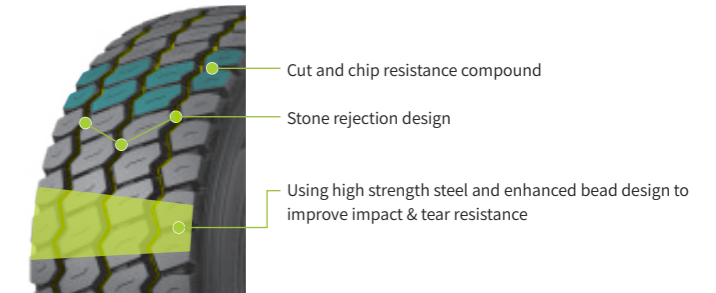

| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|--------------|--------------|----|-------|---|-----|---|------------|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | | | | | |
| 3302002016 | 385/65R22.5 | 11.75 | 20 | 9920 | | 130 | | 160 | 22 | 68 | 42.2 | 15.3 |
| Pending | *425/65R22.5 | 12.25 | 20 | 11400 | | 120 | | 165 | 23 | 68 | 44.3 | 16.6 |

* COMING SOON

AD218

Application

Mixed Service Drive



- ✓ Long tread life
- ✓ Maximum traction
- ✓ Cut & Chip resistant compound
- ✓ Better durability



○ Suitable



Wear resistant compound offers longer overall tire life

Enhanced bead structure design improves load carrying capacity

New tread pattern design offers excellent grip capacity




| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|---------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| Pending | 11R22.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 28 | 75 | 41.9 | 11.0 |
| Pending | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 28 | 75 | 43.5 | 11.0 |

AF516

Application

Long Haul Steer

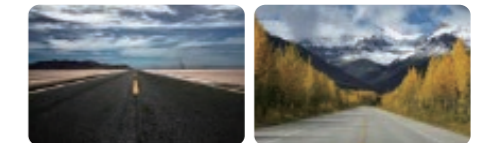

- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and Ecogreen
- ✓ Excellent cost-performance



○ Suitable



| Item Number | Size | Approved Rim | PR | LBS | | PSI | | Load Index | | Tread Depth (32nds) | Speed Rating (MPH) | Outside Diameter (in) | Section Width (in) |
|-------------|-------------|--------------|----|------|------|-----|-----|------------|-----|---------------------|--------------------|-----------------------|--------------------|
| | | | | S | D | S | D | S | D | | | | |
| Pending | 11R22.5 | 8.25 | 16 | 6945 | 6395 | 120 | 120 | 148 | 145 | 21 | 75 | 41.5 | 11.0 |
| Pending | 11R24.5 | 8.25 | 16 | 7160 | 6610 | 120 | 120 | 149 | 146 | 21 | 75 | 43.5 | 11.0 |
| Pending | 285/75R24.5 | 8.25 | 16 | 6610 | 6005 | 120 | 120 | 147 | 144 | 21 | 75 | 41.3 | 11.1 |
| Pending | 295/75R22.5 | 9.00 | 16 | 6610 | 6005 | 120 | 120 | 146 | 143 | 21 | 75 | 39.9 | 11.7 |

AMULET Limited Warranty

Please refer to actual accompanied warranty for full details.



Qualified Warranty Participants

Free Tire Replacement
Prorated Adjustment
Exclusions



Casing Policy

Casing warranty herein is valid only for the first five (5) years after the date of manufacture for all casings.



Owner's Obligations

Present to authorized dealer
Provide proof of purchase
Pay applicable fees
Properly care for the tire



Legal Rights

This warranty gives you specific legal rights and this limited warranty is applicable only in the United States.

Disclaimer

This warranty, or any warranty stored or referenced to herein, is exclusive and in lieu of any other warranty regarding the quality of Amulet tires whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein.

This Limited Warranty provides tire replacement, but only under certain conditions. This limited warranty applies to all Amulet radial truck tires used in normal driving conditions and are deemed warrantable based on the criteria set within this warranty. There is no warranty for tires that wear out, fail or become unserviceable because of neglect or mistreatment. It is imperative that you abide by all safety standards and maintenance practices. Please carefully read the terms and conditions as defined within this warranty.

This warranty covers only new Amulet radial truck tires to the extent that they are free from defects in materials and workmanship for the life of the original tread of the new tire, less 2/32". The life of the original usable tread ends when the tire has worn down and only has 2/32" remaining. Once the tread is worn down to the top of the built-in "wear indicators" in the tread grooves molded at 2/32", the tire is considered fully worn out regardless of its age or mileage. This warranty applies to Amulet radial truck tires purchased through an authorized Amulet dealer.

Safety Practices

Serious injury or property damage may result from:

- TIRE FAILURE DUE TO OVERINFLATION, UNDERINFLATION and/or OVERLOADING.
- Not following the owner's manual or tire placard on vehicle.
- TIRE FAILURE DUE TO EXCESSIVE HIGH SPEED. Follow the owner's manual or tire placard in vehicle for guidance.
- EXPLOSION OF TIRE /RIM ASSEMBLY DUE TO IMPROPER MOUNTING. Only specially trained persons should mount tires.
- FAILURE TO MOUNT RADIAL TIRES ON APPROVED RIMS.
- FAILURE TO DEFLATE SINGLE OR DUAL ASSEMBLIES COMPLETELY BEFORE DISMOUNTING.
- TIRE SPIINNING. On slippery surfaces such as rain, snow, mud, ice etc. do not spin tires, as personal injury and severe damage may result from excessive wheel spinning, including tire disintegration or axle damage.

Qualified Warranty Participants

This warranty applies to the original owner or user of any new Amulet radial truck tire sold through an authorized dealer. Tires eligible for warranty must bear the Amulet brand name, a complete D.O.T. serial identification number, NOT be stamped as Non-Adjustable (NA) and operated in normal driving conditions. Eligible tires must be on the vehicle on which they were originally installed, in conformance with the vehicle manufacturer's recommendations. These tires are covered by this warranty for the life of the original usable tread depth (the original tread depth down to the level of treadwear indicators molded at 2/32 inch) within 60 months for standard tires and 72 months for Smartway verified tires from the date of purchase (proof of purchase required). If proof of purchase is not available the coverage will be 60 months from the date of manufacture for standard tires and 72 months from the date of manufacture for all Smartway verified tires.

Free Tire Replacement

If a defect in workmanship and materials is found in any Amulet radial truck tire within the first 50% of the original usable tread (original tread depth, less 2/32", divided by 2), the tire will be replaced with a comparable new tire.

Mounting and balancing services, other applicable taxes and fees for the comparable new Amulet tire are payable by the owner.

Prorated Adjustment

If a defect in materials and workmanship is confirmed by an officially appointed Amulet representative in any Amulet radial truck tire after the first 50% of the original usable tread, a credit will be provided toward the purchase of a comparable new Amulet tire. The tire will be pro-rated based on the usable tread depth remaining on the returned tire versus the original tread of the new tire. Applicable taxes and current Federal Excise Tax (FET) on the new tire and the costs of mounting and balancing and other services will be the responsibility of the tire owner.

Adjustments to “out-of-balance” or “out-of-round” tires will only be allowed only during the first 2/32” or 10% of the original tread depth.

Exclusions

- A. All Amulet warranties are limited to the original purchaser and the original vehicle on which they are mounted. Warranties are not transferable to subsequent purchasers or vehicles.
- B. This limited warranty is valid only in the United States. Any tire used or equipped on a vehicle registered or regularly operated outside the United States is not covered by this warranty.
- C. The following is not covered by the Limited Warranty:
 - a. Tire marked “Non-Adjustable” (N/A) or “Blemished” (Blem), or previously adjusted.
 - b. Failure, damage or irregular wear due to:
 - Road hazards (i.e. puncture, cut, snag, impact breaks, etc.)
 - Contact with vehicle parts, excessive sidewall scrubbing due to curbing, stone drilling, brake skid, wreck or collision;
 - Fire, lightning, electrical damage, accident or vandalism;
 - Mechanical condition of vehicle, including misalignment, wheel imbalance, faulty shocks or brakes, worn suspension or steering parts;
 - Misapplication of tire, use of improper inner tube;
 - Alteration of the tire or addition of foreign material or transfer from one vehicle to another, and
 - Faulty retreading or repairing procedures or materials used in the retreading process
 - c. Cost of mounting and balancing or other services except as noted.
 - d. Loss of time or use, inconvenience, or any incidental or consequential damages.
 - e. Tires operated at speeds that exceed posted limits, and tires used in racing or competition.
 - f. Tires used in non-standard applications.
 - g. Tires designed for highway use operated in off-road conditions.
 - h. Tires that are improperly repaired including, but not limited to; sidewall modification by addition or removal of material, tubeless tires into which anything other than air has been introduced including foam, dry or liquid balancers and sealants.
 - i. Tire/tube failure and air loss that has resulted from tube manufacturing deficiencies, tube deterioration, tire under/over inflation, improper tube and flap assembly, mounting tool damage, use of wrong size tube or a used tube, a bias tube in a radial application, applying an incompatible mounting lubricant, foreign objects contacting tube assembly.
 - j. Tubes, tube fitment, tube usage are not covered under this warranty.
 - k. Tires subjected to vehicle suspension deficiencies, wheels misalignment, improperly maintained balance or inflation.
 - l. Tires submitted for ride disturbance complaints after the first two thirty-seconds of an inch (2/32”) new tread wear.
 - m. Tires with the Department of Transportation (DOT) number removed.
 - n. Tires worn past the last two thirty-seconds of an inch (2/32”) of original tread depth.
 - o. Ozone cracking or weather checking on tires submitted more than four years (4) after the date of manufacture.
- D. Retreadability
 - a. There is no coverage applied to tires with any exposed cords in the bead, sidewall or tread areas and/or past the last 2/32” of original tread depth.
- E. Retreadability and Extended Service and Retreads
 - a. Tires rendered non-retreadable or unserviceable due to faulty or improper retreading. Improper retreading includes buffing to the cord surface, insufficient vulcanization, improper repair and failure of the bonding agent.
 - b. This warranty does not cover inspection of tires for retreadability, the retread process, design, workmanship or

materials.

Casing Policy

- a. Casings of an Amulet radial truck tires are warranted against defects in workmanship and material through the first and second retread (see c. below for age restrictions). Defects in material and workmanship found and validated in the process of buffing for retread will be considered as warrantable. The number of retreads must be clearly identified on the casing sidewall.
- b. If an examination shows that a casing of an Amulet radial truck tire failed due to a defect in workmanship or material, credit will be issued towards the purchase price of a comparable new Amulet tire based on the values listed below:

| | | | | | | |
|---------------------|----------------------------|--------------------------|--------------------|----------------------------|----------------------------|--|
| SIZE | 215/75R17.5 235/75R17.5 | 225/70R19.5 245/70R19 | 11R22.5 11R24.5 | 255/70R22.5 275/70R22.5 | 275/80R22.5 295/75R22.5 | 285/75R24.5 385/65R22.5 425/65R22.5 |
| CASING VALUE (US\$) | \$15 | \$20 | \$60 | \$55 | \$50 | \$65 |

- c. Above casing warranty valid only for first five (5) years after date of manufacture of original tire for all casings.

Owner’s Obligations

In order to be eligible for Amulet Limited Warranty service, the owner must:

- Present the defective tire to an authorized Amulet dealer
- Present proof of purchase to the satisfaction of the dealer
- Pay the amount due on a new tire, less the amount of credit, including taxes, mounting and balancing charges or cost of other services ordered (except as noted above)
- Ensure proper tire maintenance, inflation pressures & loading practices in accordance with vehicle and applicable tire guides, as well as lawful operation of vehicles and adherence to government regulations.

Legal Rights

To the extent permitted by law, authorized dealers and its servicing agents shall not be held responsible for any of the following:

- Commercial Loss.
- Damage to or loss of property other than the tire itself.
- Incidental, indirect, special or consequential damages arising from any cause whatsoever, including negligence.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply to you. No representative or dealer has authority to make any representation, promise, or agreement on behalf of this Limited Warranty except as stated herein. Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstances is this representation that a tire failure cannot occur. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state. This limited warranty is applicable only in the United States.

No implied or express warranties are extended beyond the time when the tire has delivered its original tread life, except for the express warranties set forth in this “Limited Warranty”. All warranties promises and agreements, express or implied, of merchantability or otherwise, are excluded to the extent permitted by law.

Disclaimer

This warranty, or any warranty stored or referenced to herein, is exclusive and in lieu of any other warranty regarding the quality of Amulet radial truck tires whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein.